

# the Iconic Blackout Collection

## Specifications Fabric Line

Construction  
Thread Count  
Available Widths  
Roll Lengths  
Weight  
Thickness  
Instron Tear Test  
Instron Breaking Strength  
Opacity  
Flammability  
Care & Handling  
Testing & Certifications

## the Standard Blackout

4 ply (PCE Film, Fiberglass)  
60 threads per square inch  
36", 54", 63", 72", 77"  
(91 cm, 137 cm, 160 cm, 183 cm, 196 cm)  
33 yards (33 m) on 3" cores  
(Other lengths available upon request)  
12 oz per square yard  
(424 grams per square meter)  
12.5 mil (.318 mm)

Warp: 25.87    Fill: 17.53

Warp: 100    Fill: 77

Blackout

NFPA 701 Test Method 1 - 2019 Edition  
Also available as "Ultra" (CAN-ULC-S109)

May be dusted with damp cloth. Warm water, mild detergent with gentle rubbing when scrubbing is necessary

NFPA Standard 701/2019 Test Method 1  
FMVSS & CMVSS 302  
California State Fire Marshal Sec. 13115 Registration FA-35801  
SW 846-7000B-7420 (Pb) - Lead  
ASTM D4834-03/CSA-CAN 600.008 Lead  
ASTM G-21 Resistance to Fungi

## the Economy Wide Shade

4 ply (PCE Film, Fiberglass)  
60 threads per square inch  
98", 120"  
(249 cm, 305 cm)  
25 yards (23 m) on 3" cores  
(Other lengths available upon request)  
14.5 oz per square yard  
(492 grams per square meter)  
15.2 mil (.386 mm)

Warp: 40.05    Fill: 21.61

Warp: 293.33    Fill: 304.62

Blackout

NFPA 701 Test Method 1 - 2019 Edition  
Also available as "Ultra" (CAN-ULC-S109)

ATCC 6275 Aspergillus Niger/ATC 9645 Trichoderma Virus  
ASTM E1428-9 Pink Staining  
AATCC 183 - UV Blocking  
AATCC 16, Option 3 - 2003 Colorfastness to Light  
ASHRAE Standard 74-1988 - Fenestration  
GreenGuard - Gold Certified

## the Wide Shade IV

4 ply (PCE Film, Fiberglass)  
68 threads per square inch  
98", 120"  
(249 cm, 305 cm)  
25 yards (23 m) on 3" cores  
(Other lengths available upon request)  
17.5 oz per square yard  
(606 grams per square meter)  
16.9 mil (.42 mm)

Warp: 9    Fill: 10

Warp: 339    Fill: 256

Blackout

NFPA 701 Test Method 1 - 2019 Edition  
Also available as "Ultra" (CAN-ULC-S109)

## Color & Embossing

Color Match	White to Grey Tones										Neutral to Brown Tones																							
	11	12	105	106	92	47	109	109	111	118	142	10	75	37	23	51	57	34	103	104	84	26	9	32	101	100	104	104	33	38	45	36	39	
45" (114 cm)	X	X										X				X	X																	
54" (137 cm)	X	X			X		X					X			X	X	X							X							X			
63" (160 cm)	X				X		X					X			X									X										
72" & 96" (91 & 183 cm)	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
77" (196 cm)	X											X					X																	
98" (249 cm)	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
120" (305 cm)	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
120" Ultra (305 cm)	X	X			X		X		X		X		X		X		X		X		X		X		X		X		X		X		X	

Embossing Pattern	the Standard	Wide Shade
	[36", 54", 63", 72", 77"]	[98" & 120"]
Matte	X	X
DeLux	X	X
Moire	X	X
Boucle	X	X
Cloud	X	
Pebble	X	
Windsor	X	
Medina	X	
Leather	X	
Linen Plus	X	
Topaz	X	X
Sofglass	X	

## Solar Control (12 oz 4-ply)

Solar Heat Control Properties Interior Use at Zero Degree Profile Angle																
No.	Color	T <sub>s</sub>	R <sub>s</sub>	A <sub>s</sub>	T <sub>v</sub>	R <sub>v</sub>	A <sub>v</sub>	T <sub>v</sub>	O-F	SC (Single Glass)			SC (Insulating Glass)			
										1.8" CI	1/4" CI	1/4" H.A	1/2" CI	1" CI	1" H.A	
11	White 4 Ply	Tr	77	23	Tr	NA	NA	NA	NA	0.22	NA	NA	0.2	NA		
23	Bone 4 Ply	Tr	69	31	Tr	59	41	Tr	0.2	0.27	0.28	0.29	0.26	0.28	0.23	
47	Grey 4 Ply	Tr	45	55	Tr	Tr	Tr	NA	NA	0.44	0.43	0.37	NA	NA	NA	
49	Dark Grey 4 Ply	Tr	30	70	Tr	28	72	Tr	0.2	0.55	0.53	0.42	0.52	0.49	0.35	
10	Black 4 Ply	Tr	5	95	Tr	Tr	Tr	NA	NA	0.72	0.68	0.5	NA	NA	NA	

## Fabrication

Cutting: Cold, Electric Rotary Sheer, Straight Knife, Crush Cut, Ultrasonic | Welding: Heat Seal, RF

## Application

Roller Shade, Panel Track, Verticals, Banner/Print Media



Ask us about our other fabric lines which include: Cotela-TFR, the Apagón Collection, the Vision Collection, and the Commercial Collection


www.indianacoatedfabrics.com

102 Enterprise Drive - P.O. Box 1017 - Warsaw, IN 46581


info@indianacoatedfabrics.com

# the COLORS


White  
#11

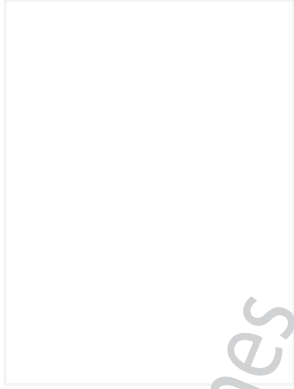

Warm White  
#75

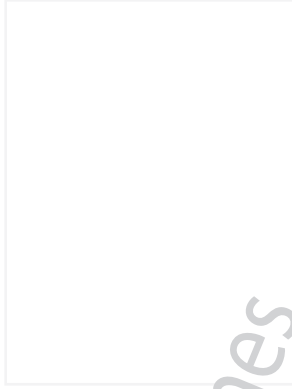

Celedron  
#101

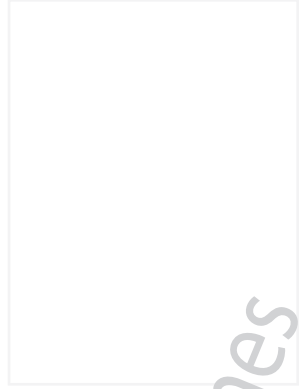

Pure White  
#12

Cream  
#37

Linge  
#100

Cloud White  
#105

Bone  
#23

Suede  
#134

Azure White  
#106

Ivory  
#51

Chocolate  
#33

Arctic Silver  
#92

Oyster  
#57

Ecrú  
#38

Grey  
#47

Clay  
#34

Forest Green  
#45

Platinum Grey  
#139

Alabaster  
#103

Denim  
#35

Dark Grey  
#49

Palomino  
#104

Navy Blue  
#19

Mineral Dust  
#111

Dark Sand  
#84

Pewter  
#118

Buff  
#26

Graphite  
#142

French Beige  
#9

Black  
#10

Champagne  
#32



Indiana  
Coated  
Fabrics



[www.indianacoatedfabrics.com](http://www.indianacoatedfabrics.com)

102 Enterprise Drive - P.O. Box 1017 - Warsaw, IN 46581

the Iconic Blackout Collection